




**WORLD'S
STRONGEST BOND™**

Product Catalogue

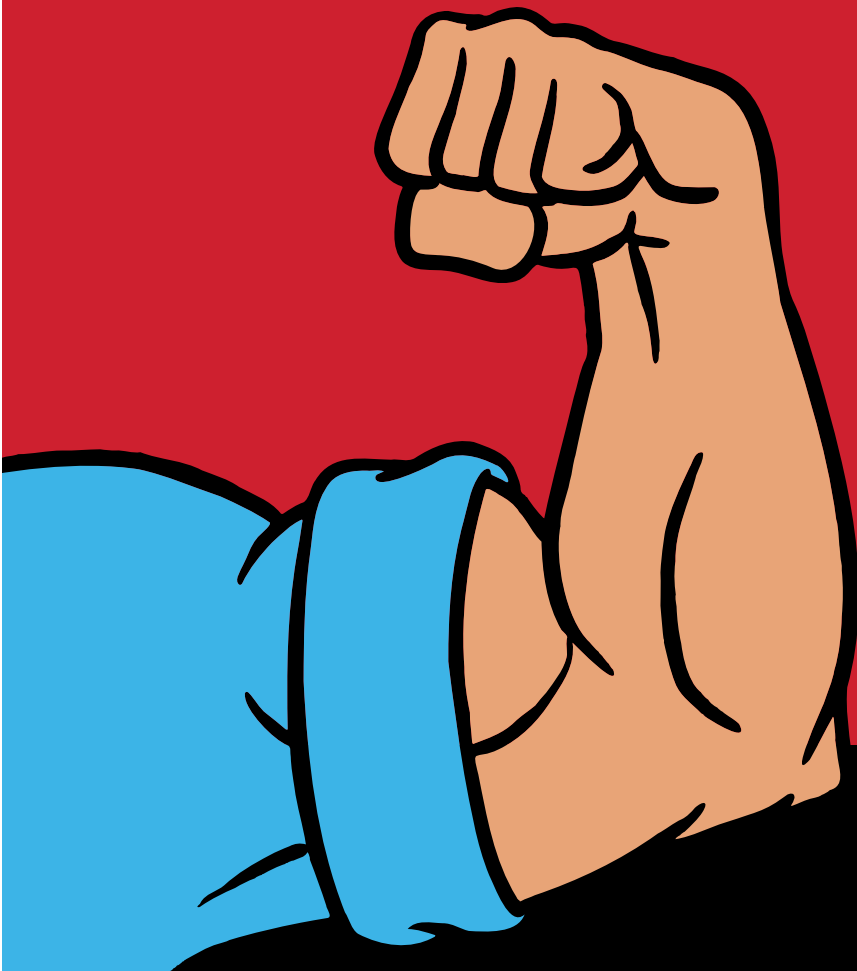

www.jbweld.com.au

ABOUT J-B WELD®

We Take Pride in Making It. You Take Pride in Using It.

Ask an avid DIYer, a mechanic, or any repair professional what he has to have in his toolbox, and he's sure to tell you about tried-and-true staples like duct tape, WD-40®, and of course J-B Weld®. For more than 40 years, our products have earned a loyal and enthusiastic following from the people who take pride in their work. They know our products bond strong to a variety of surfaces in even the toughest environments.

How It All Began: A Mom and Pop Operation

The J-B Weld® Company was founded in 1969 by Sam and Mary Bonham. Sam had discovered a need for a “cold weld” product to use in his truck service garage, instead of traditional torch welding. Working with a Texas A&M chemist, he formulated an original “tougher than steel” two-part epoxy and named it J-B Weld™. Sam and Mary soon went from selling the product out of their car to auto parts jobbers across Texas, to selling it in stores throughout the U.S. and internationally.

J-B Weld® Today: Building on a Strong Brand

The latest chapter of the J-B Weld® story began in 2008, when the company was purchased by a group of private investors led by Chip Hanson, who now serves as CEO and president. In just a few years' time, we have broadened the product line to meet the changing needs of our customers, including new adhesives for metal, wood, plastic, and general purpose use. With each new product we innovate — whether epoxy putty sticks, syringe-based epoxy adhesives, threadlockers, or specialty products — we continue to provide the world's strongest bond for your repair projects. We have also expanded our retail partnerships to reach even more customers.

Not All Adhesive Bonds Are the Same

Have you ever thought about how an adhesive works? Or why you should choose one type over another? So often, it's easier just to grab that bottle of glue from your kitchen drawer and hope it will fix whatever needs repair. But once you know the differences, you'll say: Why glue it, when you can J-B Weld™ it. We've created a simple chart to help you compare the different adhesive bonding systems out there. You'll quickly see how the strength of our J-B Weld® two-part epoxy products makes them stand apart from all the rest.

Nothing Performs Better Than J-B Weld Epoxies

J-B Weld™, known as “The Original Cold-Weld™”, was developed as an alternative to traditional torch welding. It's designed to be extremely effective in even the harshest environments. Because it's a two-component (or 2k) epoxy system, it uses reactive chemistry to create the strongest bond possible. Think of it as having a cross-woven pattern that provides extra strength, much like rebar does to reinforce cement structures. And once it sets, it's tougher than steel. All of our epoxy products are based on this same chemistry, making them the best choice for any project you need to tackle. Plus they're extremely easy to use, whether you choose the original twin tubes, the putty sticks, or the syringes.

Follow Best Practices for the Best Results

Every adhesive project requires good preparation to be successful. You can ensure J-B Weld™ will perform to its maximum when you prepare and use it according to the package instructions. You'll also want to prep the area to be repaired. For best results, use a detergent or degreaser to first clean the surface. Then roughen it with a file or coarse sandpaper. This will help create a successful and long-lasting bond.



OVER 50 YEARS OF STRENGTH.

Whether you have an important home repair, a broken part that's hard to replace or finish off a one of a kind creation or build, J-B Weld has you covered.

We're sold in over 50,000 retail stores, from hardware and automotive to home, farm, craft and more.

Founded in Texas in 1969, J-B Weld is the original 'tougher than steel' cold weld epoxy. But we've grown and innovated to offer a complete, innovative range of strongest in class products to help DIYers and pros of all skill levels confidently pull off projects both big and small from the home, to the garage, and beyond.

J-B Weld, World's Strongest Bond.™



TWIN TUBES



Our Twin Tubes are what started it all. These two-part epoxies are some of our most versatile products. With a paste-like consistency, Twin Tubes are great at filling gaps and cracks. And once cured, they create a permanent bond and can be sanded, drilled, tapped, shaped and painted.

- OUR ORIGINAL EPOXIES
- BONDING AND GAP FILLING
- MOST VERSATILE



SCAN QR CODE TO WATCH
OUR HOW TO VIDEOS!

SCAN ME

TWIN TUBES PRODUCT GUIDE



TWIN TUBES
J-B Weld
 8265S/8281
KwikWeld
 8276/8271
MarineWeld
 8272
ClearWeld
 8212/50240H

Product Attributes							Metals				Plastics			Other Materials				
Strength	Set Time	Cure Time	Dry Color	Max Temp	Fuel Resistance	Aluminum	Copper	Iron	Steel	PVC	ABS	Flexible Plastic*	Wood	Stone/Concrete	Fiberglass	Glass	Ceramic	
5020 PSI	4-6 hrs	15-24 hrs	Dark Grey	287 °C	Best	Better	Best	Best	Best	Good	Good		Better	Best	Better		Better	
3127 PSI	6 min	4-6 hrs	Dark Grey	121 °C	Good	Good	Good	Good	Good	Good	Good		Good	Better	Better		Good	
5020 PSI	4-6 hrs	15-24 hrs	Dark Grey	287 °C	Better	Best	Better	Better	Better	Better	Better		Better	Better	Best		Better	
3900 PSI	5 min	1 hr	Clear	93 °C		Good	Good	Good	Good	Best	Best	Better	Best	Good	Good	Best	Best	

*Not polypropylene or polyethylene



J-B Weld
8265S/8281



KwikWeld
8276/8271



MarineWeld
8272



ClearWeld
8212/50240H

TWIN TUBES

J-B Weld® 57g



J-B Weld is The Original Cold Weld™ two-part epoxy system that provides strong, lasting adhesion and gap-filling to metal and other surfaces.

Strength: 5020 PSI
Set time: 4-6 hours
Cure time: 15-24 hours
Cure color: Dark grey

Part No.	Description
8265S	57g

Great for:

- All metals
- Stone/Concrete
- Fiberglass

Top Attributes:

- J-B Weld's strongest epoxy
- 287°C temperature resistance
- Fuel resistant

Good for:

- Rigid plastic
- Wood
- Ceramic

Primary Applications:
 High-strength repairs and crafts, along with bonding and gap filling on metals, concrete and other surfaces.

J-B Weld® 283.6g



J-B Weld 283.6g is The Original Cold Weld™ in a pro-size kit.

Strength: 5020 PSI
Set time: 4-6 hours
Cure time: 15-24 hours
Cure color: Dark Grey

Part No.	Description
8281	283.6g

Great for:

- All metals
- Stone/Concrete
- Fiberglass

Top Attributes:

- J-B Weld's strongest epoxy
- 287°C temperature resistance
- Fuel resistant

Good for:

- Rigid plastic
- Wood
- Ceramic

Primary Applications:
 High-strength repairs and crafts, along with bonding and gap filling on metals, concrete and other surfaces.

KwikWeld® 57g



KwikWeld is the fast-setting version of The Original J-B Weld two-part epoxy system.

Strength: 3127 PSI
Set time: 6 minutes
Cure time: 4-6 hours
Cure color: Dark grey

Part No.	Description
8276	57g

Great for:

- Most metals
- Stone/Concrete
- Fiberglass

Top Attributes:

- Fast 6 min set time
- Strong bond on most surfaces

Good for:

- Rigid plastic
- Wood
- Ceramic

Primary Applications:
 Fast bonding and gap-filling projects on metal and other substrates.

TWIN TUBES



KwikWeld® 283.6g

KwikWeld 283.6g is the fast-setting version of J-B Weld in a pro-size kit.

Strength: 3127 PSI

Set time: 6 minutes

Cure time: 4-6 hours

Cure color: Dark grey

Part No.	Description
8271	283.6g

Great for:

- Most metals
- Stone/Concrete
- Fiberglass

Top Attributes:

- Fast 6 min set time
- Strong bond on most surfaces

Good for:

- Rigid plastic
- Wood
- Ceramic

Primary Applications:

Fast bonding and gap-filling projects on metal and other substrates.



MarineWeld® 57g

MarineWeld is a specially formulated two-part epoxy system that provides strong, lasting repairs for boats and other marine equipment.

Strength: 5020 PSI

Set time: 4-6 hours

Cure time: 16-24 hours

Cure color: Grey

Part No.	Description
8272	57g

Great for:

- Aluminum
- Other metals
- Fiberglass

Top Attributes:

- Waterproof
- High bonding strength

Good for:

- Rigid plastic
- Wood

Primary Applications:

Repairs on boats, pools, plumbing, and other marine equipment.



ClearWeld® 2 x 118ml

ClearWeld is a quick-setting epoxy adhesive that cures clear and provides a strong bond to most surfaces.

Strength: 3900 PSI

Set time: 5 minutes

Cure time: 1 hour

Cure color: Clear

Part No.	Description
50240H	2 x 118ml

Great for:

- Glass
- Tile
- Rigid plastic

Top Attributes:

- Cures clear
- Fast 5 min set time
- High bonding strength





Good for:

- Ceramic
- Wood
- Most metals

Primary Applications:

Quick-cure repairs and craft projects, along with bonding on plastic, glass and other surfaces.

TWIN TUBES USAGE GUIDE

PRODUCTS APPLICATIONS				
	J-B Weld Original #8265-S (57g) #8281 (283.6g)	KwikWeld #8276 (57g) #8271 (283.6g)	ClearWeld #8212 (57g) #50240H (2 x 118ml)	MarineWeld #8272 (57g)
Metal & Steel	X	X	X	X
Iron & Stainless	X	X	X	
Copper & Brass	X			
Aluminium & Bronze	X			
Coated Metals				
Machine Parts	X	X		
Exhaust Systems				
Tail Pipes	X			
Mufflers	X			
Engine Blocks	X			
Machinery	X	X		
High Temp Projects**	X			
Rust Damage	X			
Metal Tanks	X	X		
Metal Fuel Tanks	X			
Stripped Threads	X			
Garden Equip.	X	X	X	
In/Outboard Engines	X	X		X
Thermoset & Carbon Fibre				
Thermoplastics				
Fibreglass	X	X	X	X
Rigid & Semi Flexible Plastic			X	X
ABS, PVC & CPVC Pipes	X	X	X	X
Plastic Fuel Tanks*	X			
Potable Water Tanks				
Auto Trim & Bumpers			X	
Boats & Jetskis				X
Deck & Hull Accessories				X
Plumbing & Drains				X
Crafts			X	X
Toys			X	X
Wood	X	X	X	X
Composites				X
Decks	X	X		
Furniture	X	X		
Doors & Windows				
Trim/Mouldings				
Counter Tops & Cabinets				
Handles & Knobs	X	X		
Knot & Screw Holes				
Insect Damage				
Dry Rot				
Gouges & Cracks				
Concrete	X	X	X	
Ceramic & Tile	X	X	X	
Glass			X	
Rubber				
Carpet				
Vinyl				
Duct Work				
Gap Filler	X	X	X	X
Vinyl Siding			X	

SYRINGES



J-B Weld Syringes deliver high-strength bonding in an easy-to-use applicator that dispenses the two-part adhesive in a precise 1-to-1 ratio. For convenient mixing, each product comes with a tray and stick. No other tools are necessary. Syringes are ideal for bonding and gap-filling. After curing, they can be sanded and painted.

- HIGH STRENGTH, TWO-COMPONENT ADHESIVES
- PRECISE 1-TO-1 RATIO
- EASY AND CONVENIENT TO MIX



SCAN QR CODE TO WATCH
OUR HOW TO VIDEOS!

SCAN ME

SYRINGES PRODUCT GUIDE



SYRINGES	Product Attributes						Metals				Plastics				Other Materials			
	Strength	Set Time	Cure Time	Dry Color	Max Temp	Fuel Resistance	Aluminum	Copper	Iron	Steel	PVC	ABS	Flexible Plastic*	Wood	Stone/Concrete	Fiberglass	Glass	Ceramic
ClearWeld 50112/50114	3900 PSI	5 min	1 hour	Clear	121 °C		Better	Better	Better	Better	Better	Better	Better	Better	Good	Best	Better	Better
MinuteWeld 50101	2300 PSI	1 min	1 hour	Clear	121 °C		Good	Good	Good	Good	Good	Good	Good	Better	Good	Good	Good	Good
PlasticWeld 50132	3900 PSI	5 min	1 hour	Clear	121 °C		Good	Good	Good	Good	Best	Best	Better	Better	Good	Better	Good	Good
PlasticBonder 50133/ 50139	3770 PSI	15 min	30 min	Tan/Black	121 °C		Good	Good	Good	Good	Best	Best	Best	Good	Good			Good
WoodWeld 50151	3770 PSI	15 min	30 min	Tan	121 °C		Good	Good	Good	Good	Good	Good	Best	Good	Good			Good
J-B Weld 50165	5020 PSI	4-6 hrs	15-24 hrs	Dark Grey	287 °C	Best	Best	Best	Best	Good	Good		Better	Best	Best			Best
KwikWeld 50176	3127 PSI	6 min	4-6 hrs	Dark Grey	121 °C	Good	Better	Better	Better	Better	Good	Good	Better	Better	Better			Better
MarineWeld 50172	2300 PSI	5 min	1 hour	White	121 °C		Good	Good	Good	Good	Better	Better	Best	Better	Good	Better		Good
HighHeat 50197	4730 PSI	1 Hour	24 hrs (room temp) 1 hr (w/heat)	Dark Grey	287 °C	Better	Better	Better	Better	Good	Good			Better	Better			Better

*Not polypropylene or polyethylene



ClearWeld 50112/50114

MinuteWeld 50101

PlasticWeld 50132

Tan PlasticBonder 50133

Black PlasticBonder 50139

WoodWeld 50151

J-B Weld 50165

KwikWeld 50176

MarineWeld 50172

HighHeat 50197

SYRINGES



ClearWeld 25ml

ClearWeld is a clear-curing epoxy adhesive that sets quickly and provides strong adhesion.

Strength: 3900 PSI

Set time: 5 min

Cure time: 1 hour

Cure color: Clear

Part No.	Description
50112	25ml

Great for:

- Glass
- Tile
- Rigid plastics

Top Attributes:

- Cures clear
- High strength
- Quick 5 min set time

Good for:

- Ceramic
- Wood
- Most metals

Primary Applications:

Invisible, high-strength bonding applications for repairs, builds, and crafts.



ClearWeld 14ml

ClearWeld is a clear-curing epoxy that sets quickly and provides strong adhesion. Our 14ml syringe includes a one-time-use mixer for direct adhesive application.

Strength: 3900 PSI

Set time: 5 min

Cure time: 1 hour

Cure color: Clear

Part No.	Description
50114	14ml

Great for:

- Glass
- Tile
- Rigid plastics

Top Attributes:

- Cures clear
- High strength
- Quick 5 min set time

Good for:

- Ceramic
- Wood
- Most metals

Primary Applications:

Invisible, high-strength bonding applications for repairs, builds, and crafts.



MinuteWeld 25ml

MinuteWeld is a clear-curing epoxy adhesive that sets in 1 minute.

Strength: 2300 PSI

Set time: 1 minute

Cure time: 1 hour

Cure color: Clear

Part No.	Description
50101	25ml

Great for:

- Glass
- Tile
- Ceramic

Top Attributes:

- Sets in 1 minute
- Cures clear
- No clamping

Good for:

- Rigid plastics
- Metal
- Stone

Primary Applications:

Fast-setting bonding & gap-filling applications on many different substrates.

SYRINGES



PlasticWeld 25ml

PlasticWeld is a high-strength epoxy adhesive that provides a quick-setting, bond to rigid plastics.

Strength: 3900 PSI

Set time: 5 min

Cure time: 1 hour

Cure color: Clear

Part No.	Description
50132	25ml

Great for:

- PVC
- ABS
- Rigid plastics

Top Attributes:

- High bond strength
- Cures clear
- Quick 5 min set time

Good for:

- Glass
- Tile
- Metal

Primary Applications:

Clear bonding and gap-filling applications on PVC, ABS and other rigid or semi-rigid plastics.



PlasticBonder Tan 25ml

PlasticBonder is a flexible, strong adhesive that provides long-lasting bonding and gap-filling solutions to most plastics.

Strength: 3770 PSI

Set time: 15 min

Cure time: 30 min

Cure color: Tan

Part No.	Description
50133	25ml

Great for:

- Most flexible or rigid plastics*

**Not polypropylene or polyethylene*

Top Attributes:

- Flexible
- High strength
- Fast 30 min cure time

Good for:

- Fiberglass
- Metal
- Wood

Primary Applications:

Bonding and gap-filling solutions on most plastic substrates.



PlasticBonder Black 25ml

PlasticBonder is a flexible, strong adhesive that provides long-lasting bonding and gap-filling solutions to most plastics.

Strength: 3770 PSI

Set time: 15 min

Cure time: 30 min

Cure color: Black

Part No.	Description
50139	25ml

Great for:

- Most flexible or Rigid plastics*

**Not polypropylene or polyethylene*

Top Attributes:

- Flexible
- High strength
- Fast 30 min cure time

Good for:

- Fiberglass
- Metal
- Wood

Primary Applications:

Bonding and gap-filling solutions on most plastic substrates.

SYRINGES



WoodWeld 25ml

WoodWeld is a no-foam adhesive for bonding and repairing exterior or interior wood.

Strength: 3770 PSI
Set time: 15 min
Cure time: 30 min
Cure color: Tan

Part No.	Description
50151	25ml

- Great for:**
- All wood surfaces
- Good for:**
- Bonding wood to other substrates
- Top Attributes:**
- No foam
 - Quick setting
 - Sandable & paintable

Primary Applications:
 Bonds wood together and to other surfaces.



J-B Weld® 25ml

J-B Weld is our Original Cold-Weld™ epoxy in an easy-to-use syringe dispenser for strong, lasting adhesion.

Strength: 5020 PSI
Set time: 4-6 hours
Cure time: 15-24 hours
Cure color: Dark Grey

Part No.	Description
50165	25ml

- Great for:**
- All metals
 - Stone/Concrete
 - Fiberglass
- Good for:**
- Rigid plastic
 - Wood
 - Ceramic
- Top Attributes:**
- J-B Weld's strongest epoxy

Primary Applications:
 Bonds metal together and to other surfaces with high strength.



KwikWeld 25ml

KwikWeld is the fast-setting version of J-B Weld in an easy-to-use dispenser.

Strength: 3127 PSI
Set time: 6 min
Cure time: 4-6 hours
Cure color: Dark Grey

Part No.	Description
50176	25ml

- Great for:**
- Most metals
 - Stone/Concrete
 - Fiberglass
- Good for:**
- Rigid plastic
 - Wood
 - Ceramic
- Top Attributes:**
- Fast 6 minute set time
 - Strong bond on most surfaces

Primary Applications:
 Fast-bonding projects on metal and other substrates.

SYRINGES



MarineWeld 25ml

MarineWeld is an adhesive & gap filler that provides waterproof, impact and UV-resistant bonds to fiberglass, most plastics, and other surfaces.

Strength: 2350 PSI

Set time: 5 min

Cure time: 1 hour

Cure color: White

Part No.	Description
50172	25ml

Great for:

- Fiberglass
- Most plastics*
- Rubber

**Not polypropylene or polyethylene*

Good for:

- Metal
- Stone/Concrete

Top Attributes:

- Waterproof
- Flexible (Impact/vibration resistant)
- UV-resistant

Primary Applications:

Bonding and gap-filling applications for marine, pool, kitchen & bath.



HighHeat 25ml

HighHeat is a heat-resistant epoxy adhesive for bonding and gap-filling substrates exposed to high temperatures.

Strength: 4730 PSI

Set time: 1 hour

Cure time: 24 hrs (room temp) 1 hr (with heat)

Cure color: Dark Grey

Part No.	Description
50197	25ml

Great for:

- Metal
- Stone/Concrete

Good for:

- Fiberglass

Top Attributes:

- 287°C heat resistance
- Fuel resistant
- Cures in an hour with heat

Primary Applications:

Bonding and gap-filling on mufflers, tailpipes, radiators, and other automotive or high-heat repairs.



Static Mixers

Static Mixers are easy to use attachments for any of the J-B Weld 25ml syringes that allow for precise mixing of our two-component adhesives. Each mixer comes with 16 static elements to ensure complete mixing. The mixer can be cut to allow for larger and easier flow of material. Each mixer should be used within the cure time of each product. Curing will continue for any mixed, but unused portions.

Part No.	Description
50099	2 Pack

SYRINGES USAGE GUIDE

PRODUCTS APPLICATIONS	 ClearWeld #50112 (25ml) #50114 (14ml)	 J-B Weld Original #50165 (25ml)	 KwikWeld #50176 (25ml)	 Minute Weld #50101 (25ml)
Metal & Steel	X	X	X	
Iron & Stainless	X	X	X	
Copper & Brass		X	X	
Aluminium & Bronze		X	X	
Coated Metals				
Machine Parts		X	X	
Exhaust Systems				
Tail Pipes		X		
Mufflers		X		
Engine Blocks		X		
Machinery		X		
High Temp Projects**		X		
Rust Damage		X	X	
Metal Tanks		X	X	
Metal Fuel Tanks		X		
Stripped Threads				
Garden Equip.	X			
In/Outboard Engines		X		
Thermoset & Carbon Fibre				
Thermoplastics				
Fibreglass	X	X	X	
Rigid & Semi Flexible Plastic	X			X
ABS, PVC & CPVC Pipes	X	X	X	X
Plastic Fuel Tanks*		X		
Potable Water Tanks				
Auto Trim & Bumpers	X			X
Boats & Jetskis				
Deck & Hull Accessories				
Plumbing & Drains				
Crafts	X			X
Toys	X			X
Wood	X	X	X	
Composites				
Decks				
Furniture		X	X	
Doors & Windows				
Trim/Mouldings				
Counter Tops & Cabinets				
Handles & Knobs		X	X	
Knot & Screw Holes				
Insect Damage				
Dry Rot				
Gouges & Cracks				
Concrete	X	X	X	
Ceramic & Tile	X	X	X	X
Glass	X			X
Rubber				X
Carpet				
Vinyl	X			X
Duct Work				
Gap Filler	X	X	X	X
Vinyl Siding	X			X

SYRINGES USAGE GUIDE

PRODUCTS APPLICATIONS	 WoodWeld #50151 (25ml)	 MarineWeld #50172 (25ml)	 PlasticWeld #50132 (25ml)	 Plastic Bonder #50133 (Tan) (25ml) #50139 (Black) (25ml)
	Metal & Steel			
Iron & Stainless				
Copper & Brass				
Aluminium & Bronze				
Coated Metals				X
Machine Parts				
Exhaust Systems				
Tail Pipes				
Mufflers				
Engine Blocks				
Machinery				
High Temp Projects				
Rust Damage				
Metal Tanks				
Metal Fuel Tanks				
Stripped Threads				
Garden Equip.				
In/Outboard Engines		X		
Thermoset & Carbon Fibre				X
Thermoplastics				X
Fibreglass		X	X	X
Rigid & Semi Flexible Plastic		X	X	X
ABS, PVC & CPVC Pipes		X	X	X
Plastic Fuel Tanks*				
Potable Water Tanks				
Auto Trim & Bumpers			X	X
Boats & Jetskis		X	X	X
Deck & Hull Accessories		X	X	X
Plumbing & Drains		X		
Crafts		X	X	
Toys	X	X	X	X
Wood	X			X
Composites	X		X	X
Decks	X			
Furniture	X			
Doors & Windows	X			
Trim/Mouldings	X			
Counter Tops & Cabinets	X			
Handles & Knobs	X			
Knot & Screw Holes	X			
Insect Damage	X			
Dry Rot	X			
Gouges & Cracks	X			
Concrete			X	X
Ceramic & Tile			X	
Glass			X	
Rubber			X	X
Carpet				
Vinyl			X	
Duct Work				
Gap Filler	X	X	X	X
Vinyl Siding			X	

PUTTY STICKS



J-B Weld Putty Sticks put a lot of strength and versatility right in your hands. Simply mix the putty by hand until the two components are a uniform color. Then mold, shape or fill the putty into a crack, gap or hole. Once cured, the putty can be sanded, drilled, tapped and painted.

- HAND MIXABLE EPOXY PUTTY
- MOLDS TO FIT AND SHAPE ANYWHERE
- SEALS AND FILLS TO REPAIR CRACKS AND HOLES



SCAN QR CODE TO WATCH
OUR HOW TO VIDEOS!

SCAN ME

PUTTY STICKS PRODUCT GUIDE



PUTTY STICKS	Product Attributes						Metals				Plastics			Other Materials			
	Strength	Set Time	Cure Time	Dry Color	Max Temp	Fuel Resistance	Aluminum	Copper	Iron	Steel	PVC	ABS	Flexible Plastic*	Wood	Stone/Concrete	Fiberglass	Ceramic
	SteelStik 8267	4000 PSI	5 min	1 hour	Grey	176 °C	Better	Best	Best	Best	Best	Good	Good		Good	Best	Better
WaterWeld 8277	4730 PSI	25 min	1 hour	White	93 °C	Good	Better	Better	Better	Better	Best	Best		Better	Better	Best	Better
KwikWood 8257	2450 PSI	15-25 min	1 hour	Tan			Good	Good	Good	Good	Good	Good		Best	Good	Good	Good
PlasticWeld 8237	700 PSI	25 min	4 hours	White	93 °C		Good	Good	Good	Good	Better	Better	Best	Better	Good	Good	Good
HighHeat 8297	4000 PSI	1 hour	8 hours	Grey	260 °C	Better	Better	Better	Better	Better	Good	Good			Better	Better	Best
TankWeld 8217	4000 PSI	5 min	1 hour	Grey	176 °C	Best	Best	Better	Better	Best	Good	Good			Better	Better	Better



SteelStik 8267



WaterWeld 8277



KwikWood 8257



PlasticWeld 8237



HighHeat 8297



TankWeld 8217

PUTTY STICKS



SteelStik 57g

SteelStik is a hand-mixable epoxy putty that fills gaps, seals cracks, and provides structural repair on steel and other metal surfaces.

Strength: 4000 PSI

Set time: 5 min

Cure time: 1 hour

Cure color: Grey

Part No.	Description
8267	57g

Great for:

- All metals
- Stone/Concrete

Top Attributes:

- Waterproof up to 500 PSI
- Fuel resistant
- Fast 5 minute set time

Good for:

- Fiberglass
- Rigid plastics

Primary Applications:

Gap-filling, sealing, and structural repairs on plumbing, auto, home and other metal applications.



WaterWeld 57g

WaterWeld is a waterproof, hand-mixable epoxy putty that seals cracks and repairs pipes and other surfaces exposed to water.

Strength: 4730 PSI

Set time: 25 min

Cure time: 1 hour

Cure color: White

Part No.	Description
8277	57g

Great for:

- Rigid plastic
- Fiberglass

Top Attributes:

- Waterproof up to 500 PSI
- Cures underwater

Good for:

- All metals
- Stone/Concrete

Primary Applications:

Sealing and structural repairs on plumbing, marine, pool, bath/shower, and other applications.



KwikWood 28g

KwikWood is a hand-mixable epoxy putty for easy wood repair, filling, and sealing.

Strength: 2450 PSI

Set time: 15-25 min

Cure time: 1 hour

Cure color: Tan

Part No.	Description
8257	28g

Great for:

- Wood gap-filling
- Sealing
- Rebuilding

Top Attributes:

- Easy to sand
- Paintable in 1 hour
- Won't shrink or sag

Good for:

- Wood bonding

Primary Applications:

Filling holes and other damage in wood due to rot, insects, or other factors.

PUTTY STICKS



PlasticWeld 57g

PlasticWeld is a hand-mixable epoxy putty that fills gaps, seals cracks and provides structural repair on most plastics.

Strength: 700 PSI

Set time: 25 min

Cure time: 4 hours

Cure color: White

Part No.	Description
8237	57g

Great for:

- Most flexible or rigid plastics*

*Not polypropylene or polyethylene

Good for:

- Fiberglass
- Ceramic
- Metal

Top Attributes:

- Good bond strength to most plastics
- Sandable & paintable

Primary Applications:

Gap-filling and sealing on most plastic surfaces.



HighHeat 57g

HighHeat is a heat-resistant, hand-mixable epoxy putty that fills gaps and seals cracks on high-temperature surfaces.

Strength: 4000 PSI

Set time: 1 hour

Cure time: 8 hours

Cure color: Grey

Part No.	Description
8297	57g

Great for:

- Metal
- Stone/Concrete

Good for:

- Fiberglass
- Ceramic

Top Attributes:

- 260°C heat resistance
- Fuel resistant

Primary Applications:

Gap-filling and structural repair on mufflers, tailpipes, and other automotive or high-heat repairs.



TankWeld 28g

TankWeld is a fuel-resistant hand-mixable epoxy putty that seals and repairs metal tanks.

Strength: 4000 PSI

Set time: 5 min

Cure time: 1 hour

Cure color: Grey

Part No.	Description
8217	28g

Great for:

- Metal

Good for:

- Fiberglass
- Rigid plastics*

*Not polypropylene or polyethylene







Top Attributes:

- Fuel resistant
- Fast 5 minute set time

Primary Applications:

Sealing and repairing holes in metal tanks for water, gas and other chemicals.

PUTTY STICKS USAGE GUIDE

PRODUCTS APPLICATIONS	 Steel Stik #8267 (57g)	 Water Weld #8277 (57g)	 Plastic Weld #8237 (57g)	 Kwik Wood #8257 (28g)	 High Heat #8297 (57g)	 Tank Weld #8217 (28g)
	Metal & Steel	X				
Iron & Stainless	X	X			X	X
Copper & Brass	X	X				X
Aluminium & Bronze	X	X				X
Coated Metals						
Machine Parts	X				X	
Exhaust Systems	X					
Tail Pipes					X	
Mufflers					X	
Engine Blocks	X				X	
Machinery	X				X	
High Temp Projects					X	
Rust Damage	X					
Metal Tanks	X					X
Metal Fuel Tanks	X					X
Stripped Threads	X					
Garden Equip.	X					X
In/Outboard Engines	X				X	
Thermoset & Carbon Fibre						
Thermoplastics						
Fibreglass		X	X			
Rigid & Semi Flexible Plastic			X			
ABS, PVC & CPVC Pipes			X			
Plastic Fuel Tanks*	X	X				
Potable Water Tanks	X	X				X
Auto Trim & Bumpers			X			
Boats & Jetskis		X	X			
Deck & Hull Accessories		X				
Plumbing & Drains		X				
Crafts	X					
Toys	X		X			
Wood				X		
Composites				X		
Decks				X		
Furniture				X		
Doors & Windows				X		
Trim/Mouldings				X		
Counter Tops & Cabinets				X		
Handles & Knobs				X		
Knot & Screw Holes				X		
Insect Damage				X		
Dry Rot				X		
Gouges & Cracks				X		
Concrete	X	X	X			
Ceramic & Tile			X			
Glass						
Rubber						
Carpet						
Vinyl			X			
Duct Work						
Gap Filler	X	X	X	X	X	X
Vinyl Siding			X			

SILICONE SEALANTS



J-B Weld Silicone Gasket Makers and Sealants resist high temperatures, oil and water to provide long-lasting solutions for automotive and home repair.

- GASKET MAKERS AND SEALANTS
- GREAT ADHESION AND FLEXIBILITY
- 100% SILICONE – NO SHRINKING



SCAN QR CODE TO WATCH
OUR HOW TO VIDEOS!

SCAN ME

SILICONES

PRODUCT GUIDE



SILICONES	Product Attributes			Applications
	Size	Sensor Safe?	Max Temp	
Clear 31310	85g	No	204°C	Sealing and caulking of baths, showers and windows
White 31312	85g	No	204°C	Sealing and caulking of trim, moldings, sinks, and windows
Hi-Temp Red 31314/31914	85g/300ml	No	343°C	Manifolds, thermostat housing, valve covers
Blue 31316	85g	No	204°C	Oil pans, transmissions, water pumps
Black 31319	85g	No	204°C	Oil pans, interior trim, lens housing
Ultimate Copper 32325	85g	Yes	398°C	Manifolds, thermostat housing, valve covers
Ultimate Grey 32327/32927	85g/280ml	Yes	371°C	Intake manifolds, transmission pans, oil pans
Ultimate Black 32329/32929	85g/280ml	Yes	371°C	Intake manifolds, transmission pans, oil pans



Clear
31310



White
31312



Hi-Temp Red
31314



Blue
31316



Black
31319



Ultimate Copper
32325



Ultimate Grey
32327



Ultimate Black
32329



Hi-Temp Red
31914



Ultimate Grey
32927



Ultimate Black
32929

SILICONES



Clear 85g

Top Attributes:

- Waterproof
- No shrinking
- Flexible

Part No.	Description
31310	85g

Primary Applications:

- Sealing and caulking of baths, showers and windows



White 85g

Top Attributes:

- Waterproof
- No shrinking
- Flexible

Part No.	Description
31312	85g

Primary Applications:

- Sealing and caulking of trim, moldings, sinks, and windows



Hi-Temp Red 85g

Top Attributes:

- High-temperature resistant up to 343 °C

Part No.	Description
31314	85g

Primary Applications:

- Manifolds
- Thermostat housing
- Valve covers



Hi-Temp Red 300ml

Top Attributes:

- High-temperature resistant up to 343 °C

Part No.	Description
31914	300ml

Primary Applications:

- Manifolds
- Thermostat housing
- Valve covers

SILICONES



Blue 85g

Top Attributes:

- Waterproof
- No shrinking
- Flexible

Primary Applications:

- Oil pans
- Transmissions
- Water pumps

Part No.	Description
31316	85g



Black 85g

Top Attributes:

- High flexibility
- Waterproof
- Temperature Resistant up to 204 °C

Primary Applications:

- Oil pans
- Interior Trim
- Lens housing

Part No.	Description
31319	85g



Ultimate Copper 85g

Top Attributes:

- High-temperature resistant up to 398°C
- Sensor safe

Primary Applications:

- Manifolds
- Thermostat housing
- Valve covers

Part No.	Description
32325	85g



Ultimate Grey 85g

Top Attributes:

- High-torque load applications
- High-temperature resistant up to 371°C
- Sensor safe

Primary Applications:

- Intake manifolds
- Transmission pans
- Oil pans

Part No.	Description
32327	85g

SILICONES



Ultimate Grey 280ml

Top Attributes:

- High-torque load applications
- High-temperature resistant up to 371°C
- Sensor safe

Primary Applications:

- Intake manifolds
- Transmission pans
- Oil pans

Part No.	Description
32927	280ml



Ultimate Black 85g

Top Attributes:

- Maximum oil resistance
- High flexibility
- Sensor safe

Primary Applications:

- Oil pans,
- Valve covers
- Transmission Pans

Part No.	Description
32329	85g



Ultimate Black 280ml

Top Attributes:







- Maximum oil resistance
- High flexibility
- Sensor safe

Primary Applications:




- Oil pans
- Valve covers
- Transmission pans

Part No.	Description
32929	280ml



SILICONES USAGE GUIDE

PRODUCTS FEATURES BENEFITS APPLICATIONS	Ultimate Grey #32927 (280ml) #32327 (85g)		Ultimate Black #32929 (280ml) #32329 (85g)		High Temp Red #31914 (300ml) #31314 (85g)	
						
Oxmine	X		X			
Acetoxy					X	
Sensor Safe	X		X			
Set Time (Hrs)	1		1		1	
Cure Time (Hrs)	24		24		24	
Temp Resistant to	371°C		371°C		343°C	
Low Odour	X		X			
High Torque Load	X					
Oil Resistant	X		X		X	
Intake Manifolds	X					
Exhaust Manifolds					X	
Transmission Pans	X		X			
Oil Pans	X		X		X	
Timing Gear Covers	X		X		X	
Cam Covers	X					
Valve Covers			X		X	
Water Pumps	X				X	
Diff Covers					X	
Thermostat Housing						
Drive Housing					X	
Windscreens						
Weather Stripping						
General Household						
Oven Doors					X	
Bath/Shower/Sink						
Windows/Glass						
Aquariums						
Interior Trim/Moulding						
Door Frames						
Lens Housing						

SILICONES USAGE GUIDE

PRODUCTS FEATURES BENEFITS APPLICATIONS	 Black RTV #31319 (85g)	 Clear RTV #31310 (85g)	 White RTV #31312 (85g)
Oxmine			
Acetoxy	X	X	X
Sensor Safe			
Set Time (Hrs)	1	1	1
Cure Time (Hrs)	24	24	24
Temp Resistant to			
Low Odour			
High Torque Load			
Oil Resistant			
Intake Manifolds			
Exhaust Manifolds			
Transmission Pans			
Oil Pans			
Timing Gear Covers			
Cam Covers			
Valve Covers			
Water Pumps			
Diff Covers			
Thermostat Housing			
Drive Housing			
Windscreens	X		
Weather Stripping	X	X	
General Household		X	X
Oven Doors			
Bath/Shower/Sink		X	X
Windows/Glass	X	X	X
Aquariums		X	
Interior Trim/Moulding	X		X
Door Frames	X	X	X
Lens Housing	X	X	

SILICONES USAGE GUIDE

PRODUCTS FEATURES BENEFITS APPLICATIONS	 Blue RTV #31316 (85g)	 Ultimate Copper RTV #32325 (85g)	
Oxmine		X	
Acetoxo	X		
Sensor Safe		X	
Set Time (Hrs)	1	1	
Cure Time (Hrs)	24	24	
Temp Resistant to		398°C	
Low Odour		X	
High Torque Load			
Oil Resistant	X	X	
Intake Manifolds			
Exhaust Manifolds		X	
Transmission Pans	X		
Oil Pans	X	X	
Timing Gear Covers	X	X	
Cam Covers			
Valve Covers	X	X	
Water Pumps	X		
Diff Covers	X	X	
Thermostat Housing	X	X	
Drive Housing			
Windscreens			
Weather Stripping			
General Household			
Oven Doors		X	
Bath/Shower/Sink			
Windows/Glass			
Aquariums			
Interior Trim/Moulding			
Door Frames			
Lens Housing			

SUPERWELD



J-B Weld's SuperWeld line offers innovative high-strength super glues. They're easy to use, set quickly and are ideal for instant-bonding on crafts, home and auto repairs and more.

- HIGH STRENGTH SUPER GLUES
- VERSATILE QUICK-BONDING SOLUTIONS



SCAN QR CODE TO WATCH
OUR HOW TO VIDEOS!

SCAN ME

SUPERWELD PRODUCT GUIDE



	Product Attributes			Top benefits
	Size	Strength	Set Time	
SUPERWELD SuperWeld Professional Grade 33120	20g	3500 PSI	10 sec	Highest strength
SuperWeld Extreme 33400	15g	3000 PSI	30 sec	Thick gel, highest flexibility, impact resistance, and control
SuperWeld Brush-On 33106	6g	3100 PSI	10 sec	Brush-on for clean, controlled applications
SuperWeld 2-Pack 33102	2 x 2g	700 PSI	25 min	Low cost "value pack" of two units



SuperWeld Professional Grade
33120



SuperWeld Extreme
33400



SuperWeld Brush-On
33106



SuperWeld 2-Pack
33102

SUPERWELD



SuperWeld Professional Grade 20g

SuperWeld Professional Grade is our strongest super glue that provides an instant bond in just seconds.

Strength: 3500 PSI
Set time: 10 sec
Cure time: 24 hours

Part No.	Description
33120	20 g

Great for:

- All metals
- Stone/Concrete
- Fiberglass

Top Attributes:

- Strongest super glue
- 10 second set time

Good for:

- Rigid plastics
- Glass
- Wood

Primary Applications:
High-strength, quick bonding for repairs and projects on most surfaces.



SuperWeld Extreme 15g

SuperWeld Extreme is a super glue gel that is specially-formulated to provide a flexible, impact-resistant bond in seconds.

Strength: 3000 PSI
Set time: 30 sec
Cure time: 24 hours

Part No.	Description
33400	15g

Great for:

- Most plastics
- Rubber
- Leather

Top Attributes:

- Flexible, impact-resistant bond
- No-drip gel formula for maximum control

Good for:

- All metals
- Stone/concrete
- Wood

Primary Applications:
Bonding applications for repair and crafts that require flexibility, impact-resistance, or need to be applied on vertical surfaces.



SuperWeld Brush-On 6g

SuperWeld Brush-On delivers a strong bond in just seconds and includes a handy brush for even application on surfaces.

Strength: 3100 PSI
Set time: 10 sec
Cure time: 24 hours

Part No.	Description
33106	6g

Great for:

- Rigid Plastics
- Metal

Top Attributes:

- Brush included for no-mess, controlled applications

Good for:

- Glass
- Wood
- Stone/Concrete

Primary Applications:
Clean, controlled glue applications for craft projects or repairs, especially in tight spaces.

SUPERWELD

SuperWeld 2-Pack 2 x 2g



SuperWeld is a super glue formulated for high strength that bonds instantly.

Strength: 700 PSI

Set time: 25 min

Cure time: 4 hours

Part No.	Description
33102	2 x 2g

Great for:

- Rigid Plastics
- Metal

Good for:

- Glass
- Wood
- Stone/Concrete

Top Attributes:

- 2-pack super glue tubes

Primary Applications:

Quick-bonding for repairs and projects on most surfaces.

SUPERWELD USAGE GUIDE

PRODUCTS FEATURES BENEFITS APPLICATIONS	SuperWeld Tubes 2 pack 2g #33102 (4g)	SuperWeld Brush On #33106 (6g)	SuperWeld Extreme #33400 (15g)	SuperWeld Large Bottle #33120 (20g)
	Metal	X	X	X
Plastic	X	X	X	X
Wood	X	X	X	X
Concrete				
Ceramics	X	X	X	X
Fibreglass				
Aluminium				
Glass	X	X	X	X
Rubber	X	X	X	X
Cloth		X	X	X
Leather	X	X	X	X
Household	X	X	X	X
Automotive	X	X	X	X
Rear View Mirrors		X		
Craft	X	X	X	X

NOTE: This is a "General Use" guide only. Some products may or may not be suitable for other listed purposes. Please trial at your own discretion.

FIBERWELD REPAIR CASTS



J-B Weld FiberWeld repair casts combine high-strength fiberglass wraps with adhesive for quick-curing repairs or structural reinforcement. They're easy to apply, just dip in water and wrap around the damaged area and secure. After curing, the wraps can be sanded and painted.

- EASY TO USE: JUST WET IT AND WRAP IT
- HIGH STRENGTH FOR STRUCTURAL REPAIRS AND SEALING
- CAN PAINT AND SAND

J-B WELD World's Strongest Bond™
FiberWeld™
Automotive Repair Cast

J-B WELD World's Strongest Bond™
FiberWeld™
Permanent Repair Cast

Water-Activated Fiberglass Wrap
High-Strength Adhesive & Fiberglass in ONE!
Bend Strength: 1500 PSI!

Easy to Use:
Wet, Apply, Done!
Hardens Like Steel in 15 Minutes

Great for:

- Outdoor/Indoor Furniture
- Tool Handles
- Yard Equipment
- Pipes & Hoses
- Sporting & Camping Gear
- Preventative Reinforcement

Kit Contains: 1-2" x 36" Repair Cast, 1-Pair of Gloves, 1-Securing Bandage 2" x 24"

1-2" x 36" Repair Cast
1-Pair of Gloves
1-Securing Bandage 2" x 24"

MADE IN USA

Kit Contains: 1-2" x 36" Repair Cast, 1-Pair of Gloves, 1-Securing Bandage 2" x 24"



SCAN QR CODE TO WATCH
OUR HOW TO VIDEOS!

SCAN ME

FIBERWELD REPAIR CASTS PRODUCT GUIDE



Product Attributes		Repair and Reinforce Applications
Length	Cure Color	
FiberWeld Permanent Repair Cast 38236	5cm x 91cm Black	Tool handles, furniture, yard equipment, sporting & camping gear
FiberWeld Automotive Repair Cast 38237	5cm x 91cm Black	Radiator hoses, tailpipes/mufflers, oil & transmission lines
FiberWeld 1" Pipe Repair Cast 38248	2.5cm x 121cm White	Plumbing pipes up to 2.5cm diameter
FiberWeld 2" Pipe Repair Cast 38260	5cm x 121cm White	Plumbing pipes up to 5cm diameter

FIBERWELD REPAIR CASTS



FiberWeld Permanent Repair Cast 38236



FiberWeld Automotive Repair Cast 38237



FiberWeld 1" Pipe Repair Cast 38248



FiberWeld 2" Pipe Repair Cast 38260

FIBERWELD REPAIR CASTS



FiberWeld Permanent Repair Cast 5cm x 91cm

FiberWeld Permanent Repair Cast is a high-strength fiberglass wrap, permeated with a specially-formulated resin that hardens like steel in 15 minutes.

Strength: 1500 PSI

Set time: 15 min

Cure time: 1 hour

Great for:

- Wood
- Metal
- Fiberglass

Top Attributes:

- Works like a cast – just wet and wrap
- Cures in 15 minutes
- Sandable & paintable

Good for:

- Rubber
- Rigid plastics

Primary Applications:

Structural repairs and reinforcement on furniture, tool handles, sporting equipment, and more.

Part No.	Description
38236	5cm x 91cm



FiberWeld Automotive Repair Cast 5cm x 91cm

FiberWeld Automotive Repair Wrap is a fiberglass wrap that hardens like steel in 15 minutes for temperature and water-resistant automotive repairs.

Strength: 1500 PSI

Set time: 15 min

Cure time: 1 hour

Great for:

- Metal
- Rubber
- Rigid plastics

Top Attributes:

- Works like a cast – just wet and wrap
- 204°C heat resistance
- 100 PSI water resistance

Good for:

- Fiberglass

Primary Applications:

Repairing and sealing radiator hoses, tailpipes, mufflers, and other auto/RV emergency repairs.

Part No.	Description
38237	5cm x 91cm



FiberWeld 1" Pipe Repair Cast 2.5cm x 121cm

FiberWeld 1" Pipe Repair Cast is a high-strength fiberglass wrap, permeated with a specially-formulated resin to repair pipes up to 2.5cm in diameter.

Strength: 1500 PSI

Set time: 15 min

Cure time: 1 hour

Great for:

- PVC
- Copper
- Steel

Top Attributes:

- Works like a cast – just wet and wrap
- Holds water pressure up to 500 PSI
- Anti-corrosive

Good for:

- Cast iron
- ABS

Primary Applications:

Repair and reinforcement for pipes up to 1" diameter.

Part No.	Description
38248	2.5cm x 121cm

FIBERWELD REPAIR CASTS



FiberWeld 2" Pipe Repair Cast 5cm x 152cm

FiberWeld 2" Pipe Repair Cast is a high-strength fiberglass wrap, permeated with a specially-formulated resin to repair pipes up to 5cm in diameter.

Strength: 1500 PSI

Set time: 15 min

Cure time: 1 hour

Great for:

- PVC
- Copper
- Steel

Top Attributes:

- Works like a cast – just wet and wrap
- Holds water pressure up to 500 PSI
- Anti-corrosive

Good for:

- Cast iron
- ABS

Primary Applications:

Repair and reinforcement for pipes up to 5cm diameter.

Part No.	Description
38260	5cm x 152cm

EXHAUST REPAIR



J-B Weld Exhaust Repair pastes and adhesives are designed to seal and structurally repair almost any part of your vehicle's exhaust system. These products are specially-formulated to withstand extremely high temperatures.

- RESIST HIGH TEMPERATURES
- PASTES FOR SEALING
- ADHESIVES FOR REPAIRING



SCAN QR CODE TO WATCH
OUR HOW TO VIDEOS!

SCAN ME

EXHAUST REPAIR PRODUCT GUIDE



EXHAUST REPAIR	Product Attributes				Application	Use on
	Type	Size	Max Temp	Cure Time		
Tiger Patch Kit 39205	Wrap	5cm x 91cm	315°C	20 min (with heat)	High strength sealing and insulation	Mufflers and Tailpipes
Tiger Patch 39206	Wrap	5cm x 91cm	315°C	20 min (with heat)	High strength sealing and insulation	Mufflers and Tailpipes
ExhaustWeld 38572	Wrap	5cm x 182cm	593°C	2 hours (no heat), 20 min (with heat)	High strength repairs, sealing and insulation on breaks, holes and cracks	Anywhere on exhaust system
ExtremeHeat 37901	Paste	85g	538°C	20 min (with heat)	Sealing cracks, apply in thin layers	Anywhere on exhaust system
Exhaust System Sealant 37903	Paste	85g	454°C	20 min (with heat)	Gap filling and seam/connector	From tailpipe to catalytic converter
MufflerSeal 37906/37912	Paste	170g/340g	454°C	20 min (with heat)	Sealing cracks	Mufflers and Tailpipes



Tiger Patch Kit
39205



Tiger Patch
39206



ExhaustWeld
38572



ExtremeHeat
37901



Exhaust System Sealant
37903



MufflerSeal
37906



MufflerSeal
37912

EXHAUST REPAIR

Tiger patch Kit 5cm x 91cm



J-B Weld Tiger patch Kit is a temperature-resistant epoxy combined with a fiberglass wrap that cures with heat to permanently patch holes and cracks in mufflers and tailpipes. The kit includes aluminum tape for sealing and securing.

Use on:

- Mufflers and tailpipes

Primary Applications:

- Sealing holes and cracks

Temp resistance: 315°C

Set time: N/A

Cure time: 20 minutes (with heat)

Part No.	Description
39205	5cm x 91cm

Tiger patch 5cm x 91cm



J-B Weld Tiger patch is a temperature-resistant epoxy combined with a fiberglass wrap that cures with heat to permanently patch holes and cracks in mufflers and tailpipes.

Use on:

- Mufflers and tailpipes

Primary Applications:

- High-strength sealing and insulation

Temp resistance: 315°C

Set time: N/A

Cure time: 20 minutes (with heat)

Part No.	Description
39206	5cm x 91cm

ExhaustWeld 5cm x 182cm



ExhaustWeld is a high-strength fiberglass wrap containing a specially formulated resin to help it withstand high temperatures anywhere on the exhaust system.

Use on:

- Any part of exhaust pipe

Primary Applications:

- High-strength repairs, sealing and insulation on breaks, holes and cracks

Temp resistance: 593°C

Set time: N/A

Cure time: 2 hours (no heat), 20 minutes (with heat)

Part No.	Description
38572	5cm x 182cm

EXHAUST REPAIR



ExtremeHeat 85g

ExtremeHeat is a steel-reinforced paste formulated to seal cracks on metal in high-temperature environments.

Temp resistance: 538°C
Set time: 1 hour
Cure time: 24 hours

Part No.	Description
37901	85g

Use on:

- Any part of exhaust pipe

Primary Applications:

- Sealing cracks
- Apply in thin layers



Exhaust System Sealant 85g

Exhaust System Sealant is a heat-resistant paste that seals and fills gaps on exhaust systems and pipe connections.

Temp resistance: 454°C
Set time: 30 min
Cure time: 2 hours

Part No.	Description
37903	85g

Use on:

- From tailpipe to catalytic converter

Primary Applications:

- Gap-filling and seam/connector sealing



MufflerSeal 170g

MufflerSeal is a sealing paste formulated to resist heat on mufflers and tailpipes.

Temp resistance: 454°C
Set time: 30 min
Cure time: 2 hours

Part No.	Description
37906	170g

Use on:

- Mufflers and tailpipes

Primary Applications:

- Sealing cracks

EXHAUST REPAIR



MufflerSeal 340g

MufflerSeal is a sealing paste formulated to resist heat on mufflers and tailpipes.

Temp resistance: 454°C

Set time: 30 min

Cure time: 2 hours

Use on:

- Mufflers and tailpipes

Primary Applications:

- Sealing cracks

Part No.	Description
37912	340g

THREAD LOCKERS



J-B Weld Threadlockers provide a reliable and superior lock and seal for threaded fasteners on all mechanical parts, body assemblies, and hundreds of other applications to prevent loosening of fasteners from shock and vibration.

- WORKS ON SCREWS, BOLTS, AND MORE, BETWEEN 0.6CM AND 2.5CM LONG
- NO SPILLS, DRIPS OR CLOGS
- HEAT RESISTANT UP TO 148°C



SCAN QR CODE TO WATCH
OUR HOW TO VIDEOS!

SCAN ME

THREADLOCKERS PRODUCT GUIDE



THREADLOCKERS	Size	Application
Perma-Lock Low Viscosity Green 29006	6 ml	Adhesive that locks and seals threaded fasteners, is ideal for application after assembly
Perma-Lock Medium Strength Blue 24206 / 24213 / 24236	6 ml / 13ml / 36ml	Adhesive that locks and seals threaded fasteners, but allows for easy hand-disassembly
Perma-Lock High Strength Red 27106 / 27113 / 27136	6 ml / 13ml / 36ml	Adhesive that locks and seals threaded fasteners that require resistance to severe shock and vibrations



Perma-Lock Low Viscosity Green
29006



Perma-Lock Medium Strength Blue
24206 / 24213 / 24236



Perma-Lock High Strength Red
27106 / 27113 / 27136

THREADLOCKERS



Perma-Lock Low Viscosity Green 6ml

Applications:

- Adhesive that locks and seals threaded fasteners, is ideal for application after assembly.

Part No.	Description
29006	6ml



Perma-Lock Medium Strength Blue 6ml

Applications:

- Adhesive that locks and seals threaded fasteners, but allows for easy hand-disassembly.

Part No.	Description
24206	6ml



Perma-Lock Medium Strength Blue 13ml

Applications:

- Adhesive that locks and seals threaded fasteners, but allows for easy hand-disassembly.

Part No.	Description
24213	13ml



Perma-Lock Medium Strength Blue 36ml

Applications:

- Adhesive that locks and seals threaded fasteners, but allows for easy hand-disassembly.

Part No.	Description
24236	36ml

THREADLOCKERS



Perma-Lock High Strength Red 6ml

Applications:

- High-strength adhesive that permanently locks and seals threaded fasteners. High resistance to severe shock and vibrations. Requires special tools for disassembly.

Part No.	Description
27106	6ml



Perma-Lock High Strength Red 13ml

Applications:

- High-strength adhesive that permanently locks and seals threaded fasteners. High resistance to severe shock and vibrations. Requires special tools for disassembly.

Part No.	Description
27113	13ml



Perma-Lock High Strength Red 36ml

Applications:

- High-strength adhesive that permanently locks and seals threaded fasteners. High resistance to severe shock and vibrations. Requires special tools for disassembly.

Part No.	Description
27136	36ml

SPECIALTY PRODUCTS



J-B Weld Specialty Repair products are designed to handle very specific fixes, from ripped leather to leaking radiators.

- APPLICATION SPECIFIC REPAIR KITS AND PRODUCTS
- ALL TOOLS INCLUDED
- SAVES TIME AND MONEY



SCAN QR CODE TO WATCH
OUR HOW TO VIDEOS!

SCAN ME

SPECIALTY PRODUCT GUIDE



SPECIALTY PRODUCTS	Contents	Primary Applications
Windshield Repair Kit 2100	Repair Resin, Syringe, Applicator, Prep Items	Repairing windshield damage up to 3.1cm diameter
TankWeld Repair Kit 2110	28g Epoxy Adhesive • 5cm x 15cm Fiberglass Reinforcing • Applicator	Repairing cracks and holes up to 10cm in length or 0.6cm in diameter on metal & aluminum gas tanks, plastic storage tanks, water tanks, and oil pans
Radiator Repair Kit 2120	28g Epoxy Adhesive • 5cm x 15cm Fiberglass Reinforcing Cloth • Applicator	Repairs and stops leaks on radiators made from aluminum, copper-brass, and most plastics
LeatherWeld Repair Kit 2130	85g Adhesive Paste • Fabric Backing • Colors for Matching • Applicator & Texturizer	Repair tears, rips or holes up to 5cm long or 0.6cm wide on auto seats, car interior, furniture, clothing, boats and more
MirrorWeld 33701	Adhesive and Accelerator	Bonding rear view mirrors to windshields
Valve Grinder 37801	42g Valve Grinding Compound	Grinding and lapping compound that removes burrs, defects, and corrosion on valve faces and seats



Windshield Saver Repair Kit
2100



TankWeld Repair Kit
2110



RadiatorWeld Repair Kit
2120



LeatherWeld Repair Kit
2130



MirrorWeld
33701



Valve Grinder
37801



Metal Strapping Kit
37990



Windshield Saver Repair Kit

Contents:

- Repair Resin
- Syringe
- Applicator
- Prep Items

Part No.

2100

Top Attributes:

- UV-cure repair system
- Prevents further spreading
- Repairs and minimizes damage

Primary Applications:

- Repairing windshield damage up to 3.1cm diameter.



TankWeld Repair Kit

Contents:

- 28g Epoxy Adhesive
- 5cm x 15cm Fiberglass Reinforcing Cloth
- Applicator

Part No.

2110

Top Attributes:

- 3100 PSI strength
- 121°C heat resistance
- Sets in 5 minutes

Primary Applications:

- Repairing cracks and holes up to 10cm in length or 0.6cm in diameter on metal & aluminum gas tanks, plastic storage tanks, water tanks, and oil pans.



RadiatorWeld Repair Kit

Contents:

- 28g Epoxy Adhesive
- 5cm x 15cm Fiberglass Reinforcing Cloth
- Applicator

Part No.

2120

Top Attributes:

- Chemical resistant
- 121°C heat resistance
- 3100 PSI strength

Primary Applications:

- Repairs and stops leaks on radiators made from aluminum, copper-brass, and most plastics.



LeatherWeld Repair Kit

Contents:

- 85g Adhesive Paste
- Fabric Backing
- Colors for Matching
- Applicator & Texturizer

Part No.

2130

Top Attributes:

- No heat cure or heat tools required
- Mix to match any color

Primary Applications:

- Repair tears, rips or holes up to 5cm long or 0.6cm wide on auto seats, car interior, furniture, clothing, boats and more.

SPECIALTY



MirrorWeld

Contents:

- Adhesive and Accelerator

Part No.

33701

Top Attributes:

- 3000 PSI strength
- 1 Hour cure
- Resists impact, moisture, humidity, heat and vibration

Primary Applications:

- Bonding rearview mirrors to windshields.



Valve Grinder

Contents:

- 42g Valve Grinding Compound

Part No.

37801

Top Attributes:

- Auto-adjust grit for fine, smooth finish

Primary Applications:

- Grinding and lapping compound that removes burrs, defects, and corrosion on valve faces and seats.



Metal Strapping Kit

Contents:

- 1.9cm x 152cm Metal Strap
- 2 Nuts and Bolts

Part No.

37990

Primary Applications:

- Hanging and clamping exhaust pipes, mufflers, plumbing pipes, gutters and downspouts.



Essential Travel Pack

Contents:

- 1 x 57g SteelStik
- 1 x 57g WaterWeld
- 1 x 57g PlasticWeld
- 1 x 57g KwikWeld
- 1 x 2g SuperWeld

Part No.

JBWETP

The J-B Weld essential travel pack provides a solution and repair option for emergency situations. Small enough to fit in the glove box or tool box, the kit contains SteelStik, WaterWeld, PlasticWeld, KwikWeld and SuperWeld. Ideal for caravanners, 4WD enthusiasts, motor cyclists, agricultural and marine, it provides repair options to get you back heading for the destination of your choice.



SteelStik
8267



WaterWeld
8277



PlasticWeld
8237



KwikWeld
8276



SuperWeld
33102

MERCHANDISERS



SteelStik Counter Display

Contents:

- 20 x 57g SteelStiks
- Clear plastic counter top dispenser

Strength: 4000 PSI

Set time: 5 min

Cure time: 1 hour

Cure color: Grey

SteelStik:

SteelStik is a hand-mixable epoxy putty that fills gaps, seals cracks, and provides structural repair on steel and other metal surfaces.

Part No.	Description
8267G-D20	115mm(W) x 140mm(D) x 270mm(H)
8267D-R1-10	Refill (quantity of 10)



SteelStik & WaterWeld Counter Display

Contents:

- 10 x 57g SteelStik
- 10 x 57g WaterWeld
- Clear plastic counter top dispenser

SteelStik is a hand-mixable epoxy putty that fills gaps, seals cracks, and provides structural repair on steel and other metal surfaces.

WaterWeld is a waterproof, hand-mixable epoxy putty that seals cracks and repairs pipes and other surfaces exposed to water.

Part No.	Description
8267-77G-20	115mm(W) x 140mm(D) x 270mm(H)

MERCHANDISERS



J-B Weld Rotating Floor Stand

Dimensions Approx: 700mm x 1900mm

Contents:

Qty	Part No.	Description	Size
Specialty Products			
4	2100	Windshield Saver Repair Kit	Kit
2	2110	TankWeld Repair Kit	Kit
2	2120	RadiatorWeld Repair Kit	Kit
2	2130	LeatherWeld Repair Kit	Kit
3	33701	MirrorWeld	0.6ml
Twin Tubes			
6	8265-S	J-B Weld Original	57g
3	8212	ClearWeld Twin Tube	57g
6	8276	KwikWeld	57g
Putty Sticks			
3	8237	PlasticWeld	57g
3	8267	SteelStik	57g
3	8277	WaterWeld	57g
3	8297	HighHeat	57g
Threadlockers			
3	24206	Perma-Lock Medium Strength Blue	6ml
2	24213	Perma-Lock Medium Strength Blue	13ml
2	24236	Perma-Lock Medium Strength Blue	36ml
3	27106	Perma-Lock High Strength Red	6ml
2	27113	Perma-Lock High Strength Red	13ml
2	27136	Perma-Lock High Strength Red	36ml
3	29006	Perma-Lock Low Viscosity Green	6ml
Silicone Sealants			
3	31310	Clear	85g
3	31312	White	85g
6	31314	Hi Temp Red	85g
6	31316	Blue	85g
3	31319	Black	85g
6	32327	Ultimate Grey	85g
6	32329	Ultimate Black	85g
SuperWeld			
3	33102	SuperWeld 2 pack (2g ea)	4g
3	33106	SuperWeld Brushable	6g
3	33120	SuperWeld	20g
3	33400	SuperWeld Extreme	15g
Exhaust Repair			
3	37903	Exhaust System Sealant	85g
3	37906	MufflerSeal	170g
3	37912	MufflerSeal	340g
2	39206	Tiger Patch	5cm x 91cm
2	38553	Ultra Heat Wrap	Kit
2	39205	Muffler Patch	Kit
FiberWeld Repair Casts			
2	38237	FiberWeld Automotive Repair Cast	Kit
2	38248	FiberWeld 1" Pipe Repair Cast	Kit
2	38236	FiberWeld Permanent Repair Cast	Kit
Syringes			
3	50165	J-B Weld Original	25ml
3	50101	MinuteWeld	25ml
3	50112	ClearWeld	25ml
3	50132	PlasticWeld	25ml
3	50139	Plastic Bonder Black	25ml
3	50151	WoodWeld	25ml
3	50172	MarineWeld	25ml
3	50176	KwikWeld	25ml
3	50099	Static Mixers - for 25ml Syringes	2 Pack



HERCULINER ISN'T JUST FOR TRUCK BEDS! WITH 101 USES IT CAN BE APPLIED TO WOOD, METAL, CONCRETE, ALUMINIUM, ASPHALT, RUBBER, FIBERGLASS, AND MOST PLASTICS, INCLUDING PVC.

Herculiner is the original do-it-yourself brush-on bed liner kit. In three easy steps a truck bed can be covered with a tough, textured polyurethane coating just like professional spray-on liners. It prevents rust and won't chip, flake or peel. Herculiner can be applied to many different types of surfaces, such as concrete, plastic, rubber, metal, wood or fiberglass.

- TOUGH, TEXTURED PAINT-ON BED LINER
- PREVENTS RUST
- WON'T CHIP, FLAKE OR PEEL



POLYURETHANE COATINGS CAN ALSO BE USED FOR:

- Automotive undercoating
- 4x4 Tubs
- Trailers
- Boat decks
- Terraces & decks
- Walkways
- Steps
- Vinyl tile floors and work areas

POLYURETHANE COATING CAN ALSO BE APPLIED TO:

- Docks & ramps
- Metal
- Concrete
- Wood
- Fiberglass
- Rubber
- Most Plastics including PVC



SCAN QR CODE TO WATCH OUR HOW TO VIDEOS!



HERCULINER

Herculiner Bed Liner Kit



Contents:

- One Herculiner 3.78L Can Ready-to-use Protective Coating
- Application Brush for Tight Spots and Corners
- Two Rollers for Easy/Even Application
- One Roller Handle
- Abrasive Pad to Prepare Truck Bed

Part No.

HCL1B8

Coverage

- The kit covers (1) 1.8m truck bed (Add 946ml can for 2.4m truck bed).
- Covers 5 - 5.5m².

Herculiner 3.78L Can



Top Attributes:

- Provides a durable skid-resistant protective coating
- Prevents rust and won't chip, flake or peel
- Tough, textured formula with a "like new" finish

Part No.

HCL1B3

Coverage

- Covers (1) 1.8m truck bed (Add 946ml can for 2.4m truck bed).
- Covers 5 - 5.5m².

Herculiner 946mL Can



Top Attributes:

- Provides a durable skid-resistant protective coating
- Prevents rust and won't chip, flake or peel
- Tough, textured formula with a "like new" finish

Part No.

HCL1B7

Coverage

- Covers 1 - 1.8m².

Herculiner Aerosol Can



Contents:

- Herculiner's #1 DIY liner in an easy-to-use aerosol spray, providing the same waterproof protection in the convenience of a spray-on coating.

Part No.

HALB15

Primary Applications:

- Great for touch-ups, cutting in before applying roll-on Herculiner, or protecting hard-to-reach areas like undercoatings and wheel wells.

HERCULINER



Herculiner Bed Liner Restore

Bed Liner Restore restores any bed liner to its original color & provides gloss to faded liners, with fade protection lasting up to 1 Year.

Primary Applications:

- Drop In liners
- Liner Coatings
- Bumpers and trim

Part No.

HAL016



Distributed by:

